
DESIGN DATA

1964 Design Data Cross-Index

Issue	Date	Page
Area and Weight of Tidbing	Nov. 11	12
Simultaneous	Lay 13	11
Bars, Parallel, System of		51
Design of		158
Off-Center A Beams, Circular Cantilver, Loaded Normal to the Plane of	pr. 29	188
Curvature S Beams, Circular Cantilever, with		136
Out-of-Plane Loading A		8-
Bolt Loads, Determination of Ju	uly 8	4-
Carlo Callo Callo		co
Castings, Steel, Design of Ja Centrifugal Force Nomogram Ja Circle, Trig Function		62 67
Reference A	pr. 1	93
Circles into Squares, Fitting Or Circular Cantilever Beams,		162
Loaded Normal to the Plane		100
of Curvature Se Circular Cantilever Beams with Out-of-Plane Loading At		136
Circular Cross-Sections, Fitting in Other Configurations Do		165
Compressible Fluids, Impluse		
Forces Caused by Moving Ju Compressible Gas Flow Rates Ap		120 182
Compression Springs, Nested, Design of	pr. 1	88
Cone, Volume of a Frustum of a At	ig. 19	86
Cross-Sections, Circular, Fitting in Other		
Configurations Do	ec. 9	165
Deflection, Minimum, Design of Long Spindles for Ma	ay 27	90
Deflection, Rotational, of Stepped Shafts Oc	t. 28	152
Design of Long Spindles for Minimum Deflection Ma	ay 27	90
Design of Nested Compression		00
Springs	or. 1	88
Design of Steel Castings Jan		62
Designing Similar Machines Ju		150
Determination of Bolt Loads Ju Determining the Developed		44
Length of Pipes No Dimensions of Shafts with		83
Flats Se	pt. 2	46

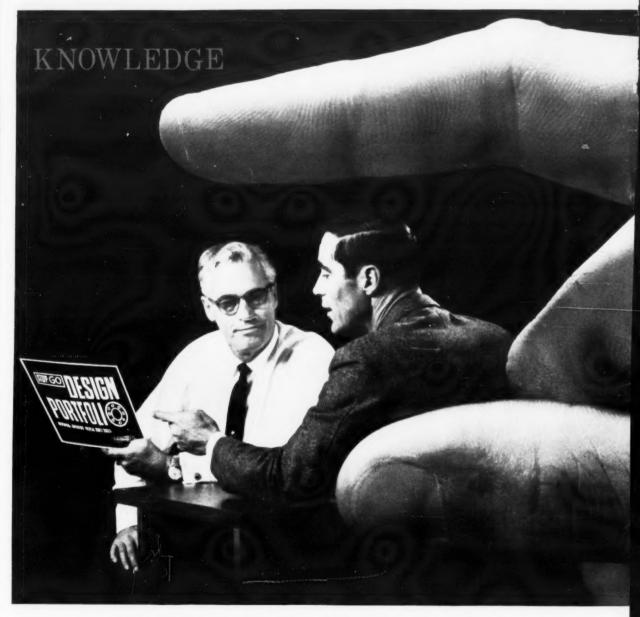

ANOTHER UNIQUE MARGIN OF FORMSPRAG

The margin of difference is knowledge. Because we're specialists in power transmission clutches, over the years we have accumulated a lot of knowledge, a lot of know-how, a lot of information about clutches . . . how to design them, how to select them, test them and evaluate them, how to build them, how to apply them.

We have compiled from our unique margin of difference in knowledge, information of significance to design engineers, and organized it into an exclusive, new Design Portfolio. It's available upon request.

Our experience with different kinds of clutches—over-running, no-load start centrifugal, reverse locking—gives us other unique margins of difference. In the design of clutches, for example, Formsprag has produced exclusive new developments year after year: new seals, new sprag configurations, new clutch sizes and many others.

In building clutches too, we've pioneered unique margins of difference: new processes to improve




DIFFERENCE IN CLUTCHES

performance; new procedures to improve order handling; new equipment to expedite deliveries.

And in applying clutches, we've created other unique margins of difference: we have a full time application Engineering Department to help you solve power transmission problems involving clutches.

It all adds up to exclusive knowledge in clutches . . . knowledge we offer to you in our Design Portfolio. It's yours for the asking.

BE A CLUTCH EXPERT WITH THE EXCLUSIVE NEW FORMSPRAG



It contains these five valuable aids to help you understand the types, selection and application of clutches:

1 Types of Clutches — Five descriptive sheets that explain the difference in over-running, indexing, back-stopping, no load start centrifugal and reverse locking clutches;

2 Clutch Catalogs—Three complete Formsprag clutch catalogs including size, rating, performance and dimensional data for all models, plus service factors, bore sizes and auxiliary equipment;

3 Application Folio—Eighteen typical power transmission problems and application solutions achieved with Formsprag clutches, to show the variety and scope available:

4 Application Service—An invitation to use the Formsprag Application Engineering Department to help you solve a specific problem, and a return card for prompt action; and;

5 Designer's Templet—A plastic tool to simplify sketching.

To obtain your Formsprag Design Portfolio promptly, write us a letter, or send the coupon below. There's no obligation.



Finishes, Industrial, Nomogram for Nov. 11 116 Fitting Circles into Squares . . . Oct. 28 162 Fitting Circular Cross-Sections in Other Configurations Dec. 9 165 Flats, Dimensions of Shafts with Flow Rates, Compressible Gas . . Apr. 29 182 Fluids, Compressible, Impulse Forces Caused by Moving . . . July 22 Force, Centrifugal, Nomogram Forces, Impulse, Caused by Moving Compressible ... July 25 120 Fluids. Four-Bar Linkage, Adjustable Graphical Synthesis of an . . . Mar. 18 Frequencies, Natural, of a Three-Mass System Sept. 30 104 Gas, Compressible, Flow Rates Apr. 29 Gas Flow System, Static Pressures in a Aug. 19 Gearing, Power Capacity of . . . June 10 The Geometry of a Oct. 28 156 Pipe Bend Graphical Synthesis of an Adjustable Four-Bar Linkage Mar. 18 145 Hydraulic Radii, Nomograms for June 24 146 Impulse Forces Caused by Moving Compressible Fluids July 22 Industrial Finishes, Nomogram for Nov. 11 Inertia, Weight Moment of . . . Feb. 19 146 Joint, Tubular, Thermal Stresses in a July 22 124 Laminated Structures, . . . Mar. 18 Riveted Feb. 6 Law, Newton's Second . . Linkage, Four-Bar Adjustable,

Issue

Ratios Apr. 15


Double Reduction Drive

Date

Page

(intinued in next page)

Graphical Synthesis of an . . . Mar. 18 145

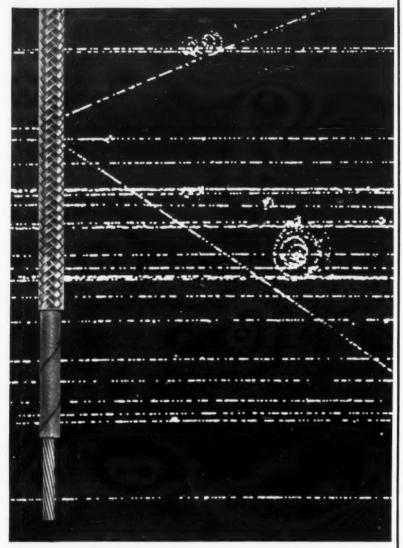

The radiation-resistance of ROCKBESTOS wires and cables is far out: up to 10¹² Roentgens

Even in the heart of the Van Allen Belt where ionization ranges from 10° to 10¹¹ Roentgens, a Rockbestos construction defies radiation. On earth this high degree of resistance will prove useful in industrial and nuclear application.

Six types are rated for 10^{12} Roentgens: Micatemp, 3 Quartz Braid, Firezone III, Phosroc II, and Phosroc III shielded and jacketed. Other Rockbestos constructions range in radiation resistance from 10^5 Roentgens to 10^{11} Roentgens.

In high temperature service from 800 F. to 2000 F., each is also meeting rigid electrical requirements in aircraft and missiles. Send for a bulletin describing Rockbestos wires and cables for heat and radiation resistance.

ROCKBESTOS WIRE & CABLE CO.

Division of CERRO CORPORATION • New Haven 4, Connecticut
Circle Service No. 44

Data Index . . . cont

Issue	Dat	e	Page
Loading, Out-of-Plane,			
Circular Cantilever Beams			
with	Aug.	5	84
Loads, Simultaneous Axial			
and Transverse	May	13	119
Machines, Similar,			
Designing	June	24	150
Meterstick, Olympic	Sept.	30	102
Moment of Inertia,			
Weight	Feb.	19	146
Natural Frequencies of a			
Three-Mass System	Sept.	30	104
Nested Compression			
Springs, Design of		1	88
Newton's Second Law	Feb.	5	78
Nomogram for Industrial			
Finishes	Not.	11	116
Nomograms for Design of	15		180
Nomograms for Hydraulic Radii	Dec.	9	158
Number, Reynolds	June	24	146 121
Number, Reyholds	. NOV.	11	121
Off-Center Concentrated			
Beam Load			188
Olympic Meterstick	Sept.	30	102
Parallel Bars, System of	Mar.	4	56
Pipe Bend, the Geometry of a	Oct.	28	156
Pipes, Determing the Developed Length of	Non	0=	09
Plates, Flat, Radial Stress	Nov.	25	83
and Deflection	Nov	95	80
Plates, Shells and, Reinforced			
by Ribs	May	27	92
Power Capacity of Gearing :	June	10	55
Pressure Vessel, Spherical,			
Thickness	Jan.	22	129
Pressures, Static, in a Gas Flow			0.0
System	Aug.	19	86
Radial Stress and Deflection of			
Flat Plates	Nov.	25	80
Radii, Hydraulic, Nomograms for	June		146
Rapid Solution of Triangles Reduction Drive Ratios, Double	Oct.	14	84
Response of a Two Mass	Apr.	15	58
System	Lan	29	125
Reynolds Number		11	121
Ribs, Shells and Plates		-	
Reinforced by	May	27	92



Circle Service No. 45

advanced design Lexington pneumatic regulator delivers 99.99%



A completely redesigned Lexington pneumatic servo regulator places a new dimension of accuracy in the pressure flow control of gases.

By "designing out" all parts contributing to regulator inaccuracy, the reliability of the Type 10 air gauge has been advanced to within a performance accuracy of 99.99%.

A unique "servo feed back feature" is the heart of the system which maintains a constant pressure balance. The actual value of regulated pressure - the pressure acting on the measuring diaphragm - is also the pneumatic servo supply pressure. It is impossible for the regulated pressure to vary from the supply pressure beyond extremely narrow limits.

Over 100,000 units are in successful operation.

Write for descriptive literature.

Lexington Controls INCORPORATED®

51 Blanchard Road, Burlington, Mass. BRowning 2-2100 MIssion 3-9000 Teletype 617-272-0527

Circle Service No. 46

Issue	Date	Page
Riveted Laminated Structures	Mar. 18	140
Rotational Deflection of Stepped Shafts	Oct. 28	152
Shafts, Dimensions of, with Flats	Sept. 2	46

Deflection of Oct. 28

. May 27

Shafts, Stepped, Rotational

Shells and Plates Reinforced

Simultaneous Axial and

Vessel, Spherical Pressure,

Thickness Jan. 22

Vibration, Torsional May 13

hy Rihs


Transverse Loads May	13	119
Specifications for Music		
Spring Wire Jan,	22	124
Spherical Pressure Vessel		
Thickness Jan.	22	129
Spindles, Long, Design of,		
for Minimum Deflection May	27	90
Spring Wire, Music,		
Specifications for Jan.	22	124
Springs, Nested Compression,		
Design of Apr.	1	88
Squares, Fitting Circles into Oct.	28	162
Static Pressures in a Gas Flow		
System Aug.	19	87
Steel Castings, Design of Jan.	8	62
Stress and Deflection, Radial, of		
Flat Plates Nov.	25	80
Stresses, Temperature, Caused by		
External Constraint Jan.	8	68
Stresses, Thermal, in a Tubular		
Joint July	22	124
System of Parallel Bars Mar.	4	56
Temperature Stresses Caused by		
External Constraint Jan.	8	68
	22	124
Three-Mass System, Natural		
Frequencies of a Sept.	30	104
Torsion Bars, Nomograms for		
Design of Dec	9	158
Torsional Vibration May	13	116
Transverse Loads, Simultaneous -		
Axial and May	13	119
Triangles, Rapid Solution of Oct.	14	84
Trig Function Reference		
Circle Apr.	1	93
Tubing, Area and Weight of Nov.	11	123
Tubular Joint, Thermal Stresses		
in a July	22	124
Two Mass System, Response of a Jan.		125

Volume of a Frustum of a Cone			86
Weight Moment of Inertia	Feb.	19	146
Wire, Music Spring, specifications for	Jan.	22	124

Maxitoro

9000

ELECTRIC CLUTCHES AND BRAKES

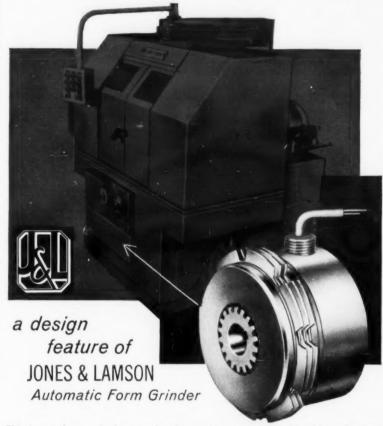

This is another typical example of a major machine tool builder who has specified MAXITORQ Series 9000 Electric Clutches and Brakes for reliable power transmission on a fully automated precision machine.

Incorporating advanced design principles proved through years of service, the MAXITORQ Electric Clutch is well adapted to all types of machine drives. Simple in design . . . built to machine tool standards . . . requires no adjustments, can be used either as a clutch or brake. Disc separators not only separate discs, but also break up residual magnetism and result in extremely fast, positive action with no drag or heating in neutral. There are few moving parts. Electrical operating unit remains stationary – hence, no troublesome slip rings, brushes, or difficult wiring problems. Operation is on standard 100 V d.c. Other voltages on special order.

If you have a clutch or brake application where you are looking for NEW and IMPROVED performance, we invite you to bring the problem to us. Phone, wire, or write Dept. DN for Bulletin No. 90.

Special features

Engaged entirely by magnetic flux * Operate either on-off or by varying voltage for torque control * NO troublesome slip rings, or brushes * NO levers, cams, or other highly stressed mechanical parts * Operation is not dependent upon rotation * Finished complete, assembled, and ready to install on shaft.



THE CARLYLE JOHNSON COMPANY Manchester, Connectiout

Circle Service No. 47